



SS-S40

SS-S40 is our bestselling rubber infilled product with years of proven durability and satisfaction. S40 is a 100% Slit yarn product that has been designed specifically for indoor (100% rubber) use. With its durability and strong traction, S40 is also our bestselling turf option for canine agility facilities.


PROPERTY	DESCRIPTION
Primary/Stalk Yarn Type:	Polyethylene Slit-Film
Standard Color(s)*:	Field and Field/Lime
Additional Color(s)*:	Clay, White, Florida Blue, Orange, Yellow, Red, Black, Brown
UV Stabilized:	Yes
Fabric Construction:	Tufted
Coating Type(s):	Silverback RB Polyurethane / Multiple pad thickness available by request
Perforations:	Optional
Yarn Denier/Ends:	8000/1
Pile Height:	2"
Face Weight:	92 oz/yd ²
Fabric Width:	15 ft.




*Custom colors available upon request

TESTING

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	2	In.	51	mm.	D-5823
Face Weight	40	oz/yd ²	1,356	g/m ²	D-5848
Total Fabric Weight	69	oz/yd ²	2,339	g/m ²	D-5848
Primary Backing Weight	7	oz/yd ²	237	g/m ²	D-5848
Secondary Backing Weight	22	oz/yd ²	746	g/m ²	D-5848
Tuft Bind	>10	lbs.	>4.3	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91.7	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	8,000	Denier	8,888	D-Tex	D-1577
Tensile Strength	9	lbs.	4.1	Kg.	D-5034
Stitch Rate	11	Per 3"	14.4	Per 10 cm	D-5793
Machine Gauge	3/8"	In.	.95	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/infill if perforated	30	in	75	cm	D-3218
Fiber Thickness	9.4	mils	100	microns	D-3218
Fabric Width	15	Ft.	4.6	M	None

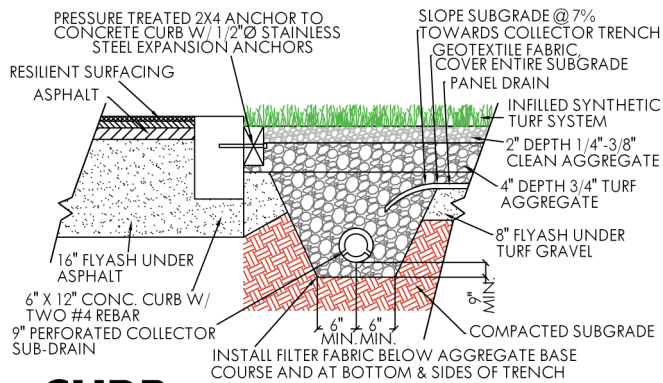

CURB

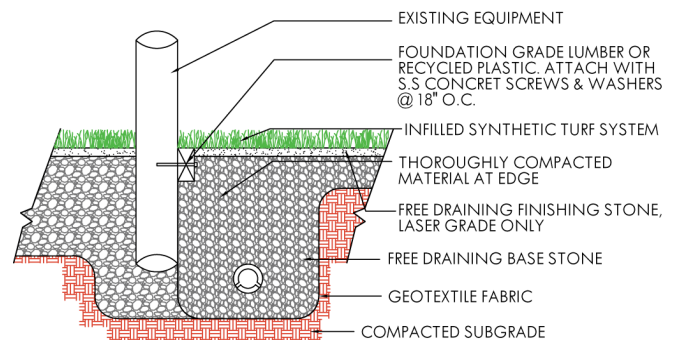

EQUIPMENT